

# Rotacioni merač DELTA

Delta merači su zapreminske merači. Protok gase pokreće klipove i svaka rotacija zahvata i provodi određenu zaprminu gase. Kretanje se mehanički prenosi preko magnetnog kvačila.

- Odlična merna stabilnost godinama atestirana od strane potrošača.
- Bez uticaja uslova instalacije ili promena vrednosti protoka u zavisnosti od mernih uslova.
- Širok opseg mogućnosti odobren od strane DRIRE, NMI, PTB i brojnih drugih službenih tela.
- MID odobren
- Optimiziran gubitak pritiska za mreže sa niskim pritiskom.
- Moguća izrada od aluminijuma, kovanog člika ili metala, za sve primene.

## *PRIMENA*

DELTA merači su konstruisani da mere protok prirodnog gase i raznih drugih filtriranih i nekorozivnih gasova. Koriste se kada su potrebna veoma tačna merenja, a u slučaju veoma niskog i nestabilnog protoka gase. Zahvaljujući zapreminskom principu DELTA merača , njegova merenja nisu zavisna od uslova instalacije. Zbog toga se mogu koristiti i u slučaju složenih instalacija bez postavljanja ravnih cevi ispred merača. Poseduju sve potrebne sertifikte.


## OPIS

DELTA merač je napravljen iz pet osnovnih delova:

- Merna komora koja je ograničena kućištem i sa dve osnovne ploče (1)
- Dva klipa koja su sinhronizovana za pomoć dva zupčanika koji rotiraju u suprotnim smerovima (2)
- Dva poklopca maziva (3)
- Magnetnog kvačila koje prenosi prenosi kretanje klipova na merač (4)
- Merač koji registruje izmereni gas (5)

## Osobine

Protok	od 0.4 m <sup>3</sup> /h do 1000 m <sup>3</sup> /h, G10 to G650	
Nominalni prečnici	DN 40 do DN 150 (1" 1/2 do 6" )	
Maksimalni radni pritisak	do 100 bar u zavisnosti od kućišta, materijala i poklopca	
Materijali	aluminijum, kovano željezo i čelik u saglasnosti sa uredbom o opremi za rad pod pritiskom 97/23/EC	
Temperaturni opseg	PED:	-30 °C do +60 °C
	MID:	-25 °C do +55 °C
	Temperatura skladištenja	-40 °C do +70 °C

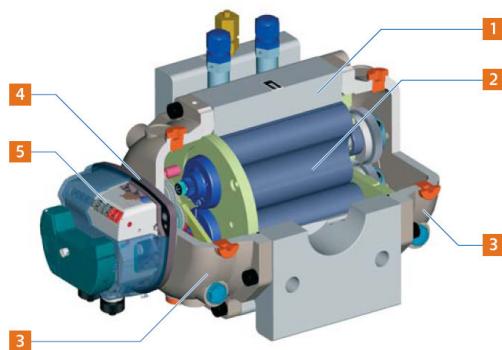

## Features



► Delta DN80 G100 in aluminium equipped with the Cyble sensor




► Universal totaliser fitted as standard with the Cyble target

<b>Flow rate</b>	from 0.4 m³/h to 1000 m³/h, G10 to G650
<b>Nominal diameters</b>	DN 40 to DN 150 (1" 1/2 to 6")
<b>Maximum working pressure</b>	up to 100 bar depending on the body material and flanging
<b>Body materials</b>	aluminum, ductile iron or steel
	Compliant with the Pressure Equipment Directive 97/23/EC
<b>Temperature range</b>	PED: -30° C to +60° C MID: -25° C to +55° C Storage temperature: -40° C to +70° C
<b>Metrology</b>	In accordance with the EC and OIML, large rangeability up to 1:200, depending on the G-size Approvals EC (PTB): 1.33-32713-ROM-E11. Large rangeability (PTB): 1.33-32713-ROM-N05 Compliant with the Measuring Instrument Directive 04/22/EC
<b>Intrinsic safety approval</b>	LCIE 06 ATEX 6031 X - Compliant with the Directive 94/9/EC

In accordance with the EC regulation, the maximum permissible error is +/-2% from Qmin to 0.2 Qmax, and +/-1% from 0.2 Qmax to Qmax. The WME (Weighted Measured Error) is less than 0.4%. Typical Actaris accuracy is +/-1% from Qmin to 0.2 Qmax, +/-0.5% from 0.2 Qmax to Qmax.

### ► Typical calibration curve

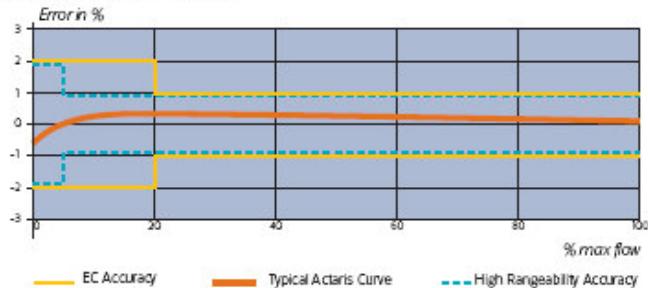

### ► Totaliser:

- 9-digit index to register a larger volume
- 45° orientation for an easy reading
- Free-rotating totaliser
- Equipped as standard with the cyble target; it allows the installation of the cyble sensor at any time.
- Equipped with 1 built-in silicagel cartridge; as an option, equipped with an external cartridge to enable easy maintenance even in extreme conditions.
- Fitted with a reflecting disc on the first drum.
- Integrated optical disc to facilitate the periodic calibration of the meter.
- Customised name plate (logo, bar-code, customer serial number..).

- IP67 protection
- UV resistant
- Unit m³

### ► Transmitters:

- Double Low Frequency fitted as standard on the whole range.
- Anti-tampering is supplied as standard (except on the 2040).
- Medium Frequency is supplied as an option on the DN50 to DN150.
- High Frequency is supplied as an option on the whole range.
- Mechanical drive according to EN 12480 is supplied as an option for the DN50 to DN150.

## Accessories / Options

- 100 µm flat gasket-filter to fit between flanges DN40 to DN150.
- External silicagel cartridge:  
accessory for maintenance on the installed external silicagel cartridge for extreme conditions.
- Flange DN50 PN10/16-ANSI125, can be delivered to adapt a 2040 meter (thread connection) to flange connections DN50.  
This gives a flange-to-flange distance of 171 mm.
- Pete's plug®:  
ideal device for filling lubricant in the cover of the meter while equipment is in service.  
It must be fitted instead of the tap plug of the cover.  
Plugged on the pressure tapping, it can be used to measure the pressure and the temperature of the measured gas.  
Connection size: 1/4" NPT or 1/4" BSP.  
Maximum pressure of gas: 20 bar.
- Bracket for mounting a volume converter:  
this device permits the Actaris Corus PTZ volume converter to be adapted directly onto the meter, or at the most convenient place to the meter to enable the converter index to be easily read.
- Thermowells:  
these threaded 1/4" NPT thermowells, can be plugged onto the meter.  
They can be retrofitted on to the standard version (plugged onto the existing pressure tapping), or they can be installed on the versions equipped with extra-tapping.  
The internal diameter of the thermowell is 7 mm; it enables mounting of most standard temperature probes.
- Extension for the totaliser:  
this option allows the possibility to increase the distance between the body of the meter and the index, to facilitate the reading when the meter is covered with ice due to measurement at low temperatures. It is available for the DN50 to DN150.
- Cyble sensor:  
it can be delivered mounted onto the meter or installed afterwards at any time.  
The Cyble sensor is a bounce-free transmitter. It allows also the counting of eventual back flows.



► Gasket filters from DN40 to DN150




► Delta DN80 G100 with Corus PTZ



► Thermowell fitted with sealing holes



► Mechanical drive according to EN 12480



► Delta DN50 G65 SI-Flow equipped with extension for the totaliser



► Delta DN40 G16 in aluminium



► Delta DN40 G25 in aluminium

## Delta 2040 - Aluminium


### Features

Flow rate	0.4 m³/h to 65 m³/h
G size	G10, G16, G25 and G40
Rangeability	1:20 to 1:100
Nominal diameter	40 (1" 1/2)
Flanging	thread BSP or NPT
Pressure range	12 bar (Option: 16 bar)

### Main characteristics

- Very compact meter; ideal for mounting in an extremely small cabinet.
  - Only the front cover has to be filled with lubricant.
  - Totaliser in gas, no magnetic coupling – integral tightness.
  - Horizontal mounting, inlet left or inlet right or vertical mounting, inlet top or inlet bottom (to be specified when ordering).
  - Thermowell: 1 supplied as option
  - Double LF connected on Binder 6 pins, no anti-tampering
- For hydrogen version, LF is not available.

- HF is supplied as an option, connected on the same plug as the LF.
- Flange DN50 PN10/16-ANSI125 can be delivered to adapt a 2040 meter (thread connection) to flanges connections DN50. This gives a flange-to-flange distance of 171 mm.

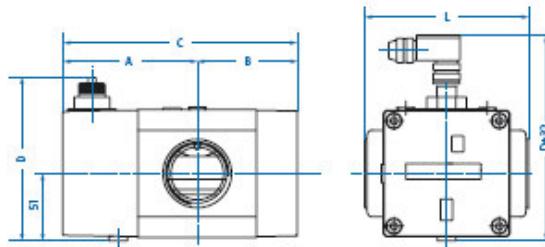

### Aluminium Range DN40:

G size	Qmax (m³/h)	DN	Flange to flange distance Dim: L	Rangeability	Starting flow (dm³/h)	Flow rate at Error ≈ -10% Typical value (dm³/h)	Pressure loss Δpr <sup>(1)</sup> (mbar)	1 Imp LF (dm³/Imp)	1 Imp HF (dm³/Imp) (Std. Gears 2038)	Freq HF at Qmax (Hz)	A	B	C	D	Vc (dm³)	Weight (Kg)
G10	16	40	121	20 to 30	30	100	0.34	0.01	0.0227	195	93	66	159	96	0.14	2.7
G16	25	40	121	20 to 50	30	100	0.83	0.01	0.0227	305	93	66	159	96	0.14	2.7
G25	40	40	121	20 to 100	50	150	1.38	0.01	0.0324	343	103	86	189	96	0.19	3.4
G40	65	40	121	20 to 100	50	200	3.32	0.01	0.0324	558	103	86	189	96	0.19	3.4

<sup>(1)</sup> Δpr: Pressure loss (mbar) with  $\rho=0,83 \text{ kg/m}^3$  and at Qmax

## Delta 2050/2080/2100 - Aluminium

### Features



Flow rate	0.4 m³/h to 400 m³/h
G size	G16, G25, G40, G65, G100, G160 and G250
Rangeability	1:20 to 1:200
Nominal diameter	50, 80 and 100 (2", 3" and 4")
Flanging	PN 10/16, PN20 and ANSI125-ANSI150
Pressure range	16 bar (Option: 19.3 bar)

### Main Characteristics

- Index can be oriented as required, magnetic coupling.
- Both front and rear covers must be filled with a lubricant.
- Multi-position meters, the flow orientation does not need to be specified when ordering the meter.
- Thermowells: supplied as an option, 2 tappings 1/4" NPT allow an easy installation of thermowells.
- Double Low Frequency transmitter connected on a Binder 6 pins plug.  
Anti-tampering is supplied as a standard.
- HF is supplied as an option, connected on a 3 pin binder.
- A G100 DN50 is available to allow the possibility of increasing the station capacity; the use of the same flanging as the G65 DN50 does not require modification of the existing installation.
- Equipped as standard with the Cyble target.



► Delta DN100 G250 in aluminium equipped with HF and Cyble sensor




### Aluminium Range DN50/DN80/DN100:

G	Qmax size (m³/h)	DN	Flange to flange distance Dim: L	Rangeability	Starting flow (dm³/h)	Flow rate at: Error =-10% Typical value (dm³/h)	Pressure loss Δp <sup>10</sup> (mbar)	1 Imp LF (m³/Imp)	1 Imp MF (dm³/Imp)	Freq MF at Qmax (Hz)	1 Imp HF (dm³/Imp) Std. Gears 32/40	Freq HF at Qmax (Hz)	A	B	C	D	Vc (dm³)	Weight (Kg)
G16	25	50	171	20 to 50	50	150	0.13	0.1	272	255	0.0585	119	190	121	311	182	0.59	11
G25	40	50	171	20 to 100	50	150	0.33	0.1	272	4.08	0.0585	190	190	121	311	182	0.59	11
G40	65	50	171	20 to 160	50	150	0.88	0.1	272	6.64	0.0585	309	190	121	311	182	0.59	11
G65	100	50	171	20 to 200	50	150	2.08	0.1	272	10.2	0.0585	475	190	121	311	182	0.59	11
	100	80	171	20 to 200	70	250	0.69	0.1	4.36	6.36	0.0939	296	228	159	387	182	0.94	15
G100	160	50	171	20 to 200	70	250	3.25	0.1	4.36	10.2	0.0939	473	228	159	387	182	0.94	15
	160	80	171	20 to 200	70	250	1.73	0.1	4.36	10.2	0.0939	473	228	159	387	182	0.94	15
G160	250	80	171	20 to 200	80	250	3.15	0.1	5.28	13.2	0.116	599	252	183	435	182	1.16	17
	250	80	241	20 to 160	150	500	2.73	1	8.26	8.41	0.178	390	230	179	409	235	1.78	29
	300	100	241	20 to 160	175	550	2.1	1	21.8	3.82	0.241	346	265	213	478	235	2.41	34
G250	400	100	241	20 to 160	200	600	2.63	1	32.6	3.40	0.365	304	333	282	615	235	3.65	43

<sup>10</sup> Δp: Pressure loss (mbar) with  $p=0.83\text{Kg}/\text{m}^2$  and at Qmax



► Delta DN80 G100 3xDN in Ductile iron equipped with Cyble sensor



Ductile iron Range DN50/80/100/150:

## Delta 2050/2080/2100 & S3-Flow - Ductile iron

EN-GJS-400-18LT (GGG40.3)

### Features

Flow rate	0.4 m³/h to 400 m³/h
G size	G16, G25, G40, G65, G100, G160 and G250
Rangeability	120 to 1200
Nominal diameter	50, 80 and 100 (2", 3" and 4")
Flanging	PN 10/16, PN20 and ANSI150
Pressure range	16 bar (Option: 19.3 bar)

### Main Characteristics

- Index can be oriented as required, magnetic coupling.
- Both front and rear covers must be filled with a lubricant.
- Multi-position meters, the flow orientation does not need to be specified when ordering the meter.
- Thermowells: supplied as an option, 2 tappings 1/4" NPT allow an easy installation of thermowells.
- Double Low Frequency transmitter connected on a Binder 6 pins plug.
- Anti-tampering is supplied as a standard.
- HF is supplied as an option (up to 3 HF possible for the S3-Flow!).
- High Temperature Loading: fire resistant PNS is supplied as an option.
- Equipped as standard with the Cyble target.

G size	Qmax (m³/h)	DN	Flange to flange distance Dim.: L	Rangeability	Starting flow (dm³/h)	Flow rate at Error $\approx$ -10% Typical value (dm³/h)	Pressure loss $\Delta p^{(1)}$ (mbar)	1 Imp LF (m³/Imp)	1 Imp MF (dm³/Imp)	Freq MF at Qmax (Hz)	1 Imp HF (dm³/Imp) (Std. Gears 32/40)	Freq HF at Qmax (Hz)	Dimensions					Weight (Kg)
													A	B	C	D	Vc (dm²)	
G16	25	50	150	20 to 50	70	250	0.1	0.1	4.36	159	0.0939	74	228	150	378	174	0.94	25
	25	50	171	20 to 50	50	150	0.13	0.1	272	255	0.0585	119	190	112	302	174	0.59	19
G25	40	50	150	20 to 100	70	250	0.21	0.1	4.36	255	0.0939	118	228	150	378	174	0.94	25
	40	50	171	20 to 100	50	150	0.33	0.1	272	4.08	0.0585	190	190	112	302	174	0.59	19
G40	65	50	150	20 to 160	70	250	0.55	0.1	4.36	414	0.0939	192	228	150	378	174	0.94	25
	65	50	171	20 to 160	50	150	0.88	0.1	272	6.64	0.0585	309	190	112	302	174	0.59	19
G65	100	50	150	20 to 200	70	250	1.3	0.1	4.36	6.36	0.0939	296	228	150	378	174	0.94	25
	100	50	171	20 to 200	50	150	2.08	0.1	272	10.2	0.0585	475	190	112	302	174	0.59	19
	100	80	171	20 to 200	70	250	0.69	0.1	4.36	6.36	0.0939	296	228	150	378	194	0.94	25
	100	80	230	20 to 80	80	250	0.52	0.1	5.28	5.26	0.116	239	252	174	426	225	116	30
	100	80	240	20 to 200	70	250	0.69	0.1	4.36	6.36	0.0939	296	228	150	378	194	0.94	27
G100	160	50	150	20 to 200	70	250	3.25	0.1	4.36	10.2	0.0939	473	228	150	378	194	0.94	25
	160	80	171	20 to 200	70	250	173	0.1	4.36	10.2	0.0939	473	228	150	378	194	0.94	25
	160	80	230	20 to 130	80	250	1.32	0.1	5.28	8.42	0.116	383	252	174	426	225	116	30
	160	80	240	20 to 200	70	250	173	0.1	4.36	10.2	0.0939	473	228	150	378	194	0.94	27
	160	80	310	20 to 100	150	500	1.15	1	8.26	5.38	0.178	250	230	179	409	235	178	45
	160	100	241	20 to 130	80	250	1.32	0.1	5.28	8.42	0.116	383	252	174	426	225	116	30
G160	250	80	230	20 to 200	80	250	3.15	0.1	5.28	13.2	0.116	599	252	174	426	225	116	30
	250	80	241	20 to 160	150	500	273	1	8.26	8.41	0.178	390	230	179	409	235	178	41
	250	80	310	20 to 160	150	500	273	1	8.26	8.41	0.178	390	230	179	409	235	178	45
	250	100	230	20 to 200	80	250	3.15	0.1	5.28	13.2	0.116	599	252	174	426	225	116	30
	250	100	241	20 to 200	80	250	3.15	0.1	5.28	13.2	0.116	599	252	174	426	225	116	30
G250	400	100	241	20 to 160	200	600	2.63	1	32.6	3.40	0.365	304	333	282	615	235	3.65	56
	400	100	400	20 to 160	200	600	2.63	1	32.6	3.40	0.365	304	333	282	615	235	3.65	61
	400	150 <sup>2</sup>	450	20 to 80	1000	2500	0.4	1	48.0	2.31	0.595	187	343	267	610	365	5.4	120
	400	650	150 <sup>2</sup>	450	20 to 130	1000	2500	2.1	1	48.0	3.76	0.595	303	343	267	610	365	5.4
G650	1000	150 <sup>2</sup>	450	20 to 200	1000	2500	4.8	1	48.0	5.79	0.595	467	343	267	610	365	5.4	120

<sup>(1)</sup> Apr. Pressure loss (mbar) with  $p=0.83 \text{ kg/m}^2$  and at Qmax

<sup>(2)</sup> S3-Flow meter

## Delta S1-Flow & 2080 - Steel

### Features

Flow rate	0.4 m³/h to 250 m³/h
G size	G16, G25, G40, G65, G100 and G160
Rangeability	1:20 to 1:200
Nominal diameter	50 and 80 (2" and 3")
Flanging	PN 10/16 to PN110, ANSI 150 to ANSI600
Pressure range	10/12 bar

### Main Characteristics



- Index can be oriented as required, magnetic coupling.
- Double Low Frequency transmitter connected on a 6 pin Binder plug.
- Anti-tampering is supplied as a standard.

#### DN50


- G16 to G100
- S-Flow technology
- Only the front cover must be filled with a lubricant
- Multi-position meter
- MF is supplied as an option.
- 2 thermowells are supplied as option.
- A by-pass can be installed as an option. It enables the gas to flow even if the meter is blocked for any reason.
- An alarm can be remotely sent requesting for maintenance.
- Up to 2 HF are supplied as option.

#### DN80

- G100 to G160
- Conventional principle
- Both front and rear covers must be filled with a lubricant
- Horizontal inlet left-vertical inlet top or horizontal inlet right-vertical inlet bottom (to be specified when ordering).
- 1 HF is supplied as an option.



► Delta DN50 G65 S1-Flow in Steel



### Steel Range DN50/80:

G size (m³/h)	Qmax (m³/h)	DN	Flange to flange distance Dim: L	Rangeability	Starting flow (dm³/h)	Flow rate at: Typical value (dm³/h)	Error ≈-10% loss Δp <sup>①</sup> (mbar)	Pressure (mbar)	1 Imp LF (m³/Imp)	1 Imp MF (dm³/Imp)	Freq MF at Qmax (Hz)	1 Imp HF (dm³/Imp) 32(40)	Freq HF at Qmax (Hz)	A	B	C	D	Vc (dm³)	Weight (Kg)
G16	25	50 <sup>②</sup>	240	20 to 30	50	150	0.21	0.1	2.31	3.01	0.0496	140	190	100	290	150	0.49	34	
G25	40	50 <sup>②</sup>	240	20 to 50	50	150	0.45	0.1	2.31	4.81	0.0496	224	190	100	290	150	0.49	34	
G40	65	50 <sup>②</sup>	240	20 to 80	50	150	1.1	0.1	2.31	7.82	0.0496	364	190	100	290	150	0.49	34	
G65	100	50 <sup>②</sup>	240	20 to 130	50	150	1.95	0.1	2.31	12.0	0.0496	560	190	100	290	150	0.49	34	
G100	160	50 <sup>②</sup>	240	20 to 200	50	150	3.95	0.1	2.31	19.3	0.0496	896	190	100	290	150	0.49	34	
	160	80	320	20 to 30	150	500	1.15	1	8.26	5.38	0.178	250	231	185	416	275	178	84	
G160	250	80	320	20 to 50	150	500	2.73	1	8.26	8.41	0.178	390	231	185	416	275	178	84	

<sup>①</sup> Δp: Pressure loss (mbar) with  $p=0.83 \text{ kg/m}^2$  and at Qmax

<sup>②</sup> S1-Flow meter

|



► Delta DN150 G650 S3-Flow  
in Ductile iron

#### A) Transmitter characteristics

Intrinsic safety approval LC.I.E. 06 ATEX 6031 X

Intrinsic safety level: Ex II 1/2 G EEx ia IIB/IIC T5 c T6

Low Frequency pulse transmitter (LF):

The LF transmitter consists of 2 dry Reed switches, normally open, and controlled by a magnet situated in the first drum of the totaliser. The LF connections are without polarity.

Characteristics of LF transmitter:

- Hermetically sealed contacts
- Maximum terminal voltage: 30 Volt and maximum current according to EN50020.
- Maximum temperature: +60°C
- Minimum pulse time: 0.4 sec
- Cable sensor:  
It conforms to CENELEC standard EN50020 with:
  - $Ui \leq 14.3$  Volt
  - $Ii \leq 50$  mA

Inductive transmitters (MF and HF):

They are inductive sensors actuated by a toothed disc. The frequency is proportional to the instantaneous flow. The polarity of the connections is indicated on the name plate of the meter.

Characteristics of transmitters:

- Proximity detector conform to EN50227 (and NAMUR) standards
- They conform to CENELEC standards (EN50014 and 50020) with
  - $Ui \leq 15$  Volt
  - $Ii \leq 50$  mA
  - $Pi \leq 120$  mW
- Maximum temperature: +60°C

Anti-tampering transmitter (AT):

This consists of one dry Reed switch, normally closed. Attempts at magnetic tampering will open the contact. The electrical characteristics are the same as those for the LF transmitter.

#### B) Pressure loss of the DELTA meters

Calculation of pressure loss:

$$\Delta p = \Delta p_r \times \frac{\rho n}{0.83} \times (P_b + 1) \times \left[ \frac{q}{Q_{max}} \right]^2 \times \left[ \frac{273}{(273 + T_b)} \right]$$

#### C) Installation

Each meter is delivered with binder plugs for the installed transmitters and oil for the lubrication. Please refer to the instruction manual supplied with the meter. The advice given therein will ensure optimal use of the DELTA meter over the years.

#### ► Where:

- $\Delta p_c$ : Pressure loss in the calculated conditions
- $\Delta p_r$ : Pressure loss in the reference conditions
- $\rho n$ : Gas density ( $\text{kg/m}^3$ ) at 0°C and 1013 mbar
- $P_b$ : Operating pressure (Bar gauge)
- $q$ : Flow rate ( $\text{m}^3/\text{h}$ )
- $Q_{max}$ : Maximum flow rate ( $\text{m}^3/\text{h}$ )
- $T_b$ : Gas temperature (°C).