



# Ventilator konvektori



## Zidni ventilator konvektor /dvocevni sistem/




### Nomenklatura




Model			MKG-250	MKG-250-B	MKG-300	MKG-300-B	MKG-400	MKG-400-B	MKG-500	MKG-500-B	MKG-600
Nominalna količina vazduha	Velika brzina	CFM	250	250	300	300	400	400	500	500	600
		m3/h	425	425	510	510	680	680	850	850	1020
	Srednja brzina	CFM	210	230	250	275	340	325	420	440	510
		m3/h	360	390	430	470	580	550	720	745	870
	Mala brzina	CFM	190	205	220	230	300	270	380	365	450
		m3/h	320	350	380	390	510	460	640	620	770
Kapacitet hlađenja	Velika brzina	kW	2.2	2.63	2.54	2.97	3.09	3.28	4.07	4.25	4.45
	Srednja brzina	kW	1.54	2.41	2.04	2.47	2.62	2.83	3.73	3.85	4.18
	Mala brzina	kW	1.45	2.16	2.5	2.12	2.27	2.41	3.24	3.32	3.74
Kapacitet grejanja	Velika brzina	kW	3.02	3.36	3.69	3.91	4.34	4.37	5.69	5.81	6.3
	Srednja brzina	kW	2.6	3.1	3.25	3.26	3.86	3.73	5.12	5.17	5.67
	Mala brzina	kW	2.23	2.79	2.77	2.77	3.25	3.17	4.32	4.43	4.73
Količina protoka vode	m3/h	0.378	0.452	0.454	0.511	0.529	0.564	0.701	0.731	0.766	
Pad pritiska vode	kPa	12	29.4	18	35.6	22	43.5	26	31.8	29	
Broj ventilatora	Kom	1	1	1	1	1	1	1	1	1	
Nivo buke (velika i srednja brzina)	dB (A)	30(28)	30(24)	35(32)	35(29)	35(32)	37(31)	38(35)	39(33)	38(35)	
Prečnik polaznog/povratnog voda	"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	
Snaga ventilatora V/M/S brzina	W	23/21/20	4 brzine vent.	41/33/27	4 brzine vent.	41/33/27	4 brzine vent.	44/42/39	4 brzine vent.	44/42/39	
Dimenzije ŠxVxD	Neto	mm	915x210x290	915x230x290	915x210x290	915x230x290	915x210x290	915x230x290	915x210x290	1072x230x315	915x210x290
	Bruto	mm	1020x300x385	1020x315x390	1020x300x385	1020x315x390	1020x300x385	1020x315x390	1020x300x385	1180x315x415	1020x300x385
Težina	Neto	Kg	12	13	12	13	12	13.3	15	15.8	15
	Bruto	Kg	16	16.3	16	16.3	16	16.7	19	19.4	19

### Beleška:

1. Test uslovi pri hlađenju : ulazna temperatura vazduha 27 DB°C/19WB°C, ulazna temperatura vode 7°C, razlika temperature vode 5°C
2. Test uslovi pri grejanju : ulazna temperatura vazduha 21 DB°C, ulazna temperatura vode 50 DB°C, količina vazduha i vode je ista kao i kod hlađenja.
3. Nivo zvuka je testiran u laboratoriji

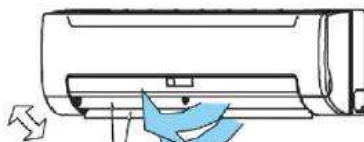

Usmeravanje vazduha horizontalno

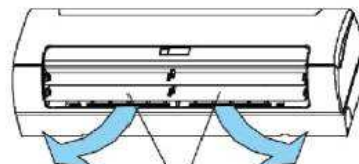

Usmeravanje vazduha vertikalno



### U opsegu isporuke:

- Svi tipovi se isporučuju sa bežičnim daljinskim upravljačem
- Integriranim trokrakim ventilom
- Multifunkcionalni LED displejom

### Opcionalno:

- Kontroler KJR-10B/DP(T)-E

